rocketfish™

Bluetooth Wireless Optical Mouse and Keyboard

RF-BTMKY

User Guide

Rocketfish RF-BTMKY Bluetooth Wireless Optical Mouse and Keyboard

Contents

Features 2
Setting up your keyboard and mouse 7
Connecting other Bluetooth devices 19
Troubleshooting 20
Legal notices 20

Features

Package contents

Make sure that your package contains:

- Keyboard
- Mouse
- USB Bluetooth dongle
- Batteries for your keyboard and mouse
- User guide
- Widcomm Bluetooth driver CD

Keyboard features:

- 103-key design
- Power-saving mode (after idling for ten minutes)
- 8 internet and multimedia keyboard hotkeys

Optical mouse features:

- Scroll wheel and two buttons
- Power-saving mode
- LED indicator

The USB Bluetooth dongle supports:

- Bluetooth specification 1.2 and 2.0
- This keyboard and mouse
- The following Bluetooth devices:
  - Generic Access Profile (GAP)
  - Generic Object Exchange Profile (GOEP)
  - Serial Port Profile (SPP)
  - File Transfer Profile (FTP)
  - Object Push Profile (OPP)
  - Dial-up Networking Profile (DUN)
  - Synchronization Profile (SYNC)
  - Fax Profile (FAX)
  - Personal Area Networking Profile (PAN)
  - Human Interface Device Profile (HID)
  - Headset/Audio Gateway Profile (HSP)
  - Hardcopy Cable Replacement Profile (HCRP)
  - Basic Imaging Profile (BIP)
  - Basic Printing Profile (BPP)
  - Generic Audio Video Distribution Profile (GAVDP)
  - Advanced Audio Distribution Profile (A2DP)
  - Audio Video Remote Control Profile (AVRCP)

Note: *For information on connection settings for Bluetooth devices, see the Bluetooth help file in the* ***My Bluetooth Places*** *window. Click the* ***My Bluetooth Places*** *icon on your Windows desktop. In the window that opens, click* ***Help****, then click* ***Bluetooth Help Topics****. For information on security codes and special instructions on particular Bluetooth devices, see the manufacturer's documentation.*

System requirements

- A computer with an available USB port
- Microsoft® Windows® XP or Windows 2000 operating system

Keyboard and mouse components

Keyboard top

Your keyboard has 103 keys. In addition to the standard keys, your keyboard has a row of *hotkeys*.

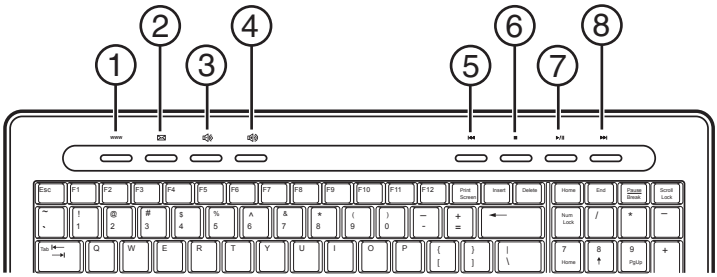

	Hotkey Icon	Function	Description
1	WWW	Internet	Press to open your default Web browser.
2	✉	E-mail	Press to open your default e-mail program.
3	🔉	Volume down	Press to decreases the volume.
4	🔊	Volume up	Press to increase the volume.
5	⏮	Rewind	Press to go to the previous media file.

	Hotkey Icon	Function	Description
6	■	Stop	Press to stop a media file that is playing.
7	▶/II	Play/Pause	Press to play or pause a media file.
8	▶▶I	Fast forward	Press to go to the next media file.

Notes:

- The 5, 6, 7 and 8 keys are multimedia hotkeys.
- Hotkeys are disabled while automatically pairing in boot and Windows mode.
- Your keyboard enters power-saving mode after being idle for 10 minutes.

Keyboard bottom

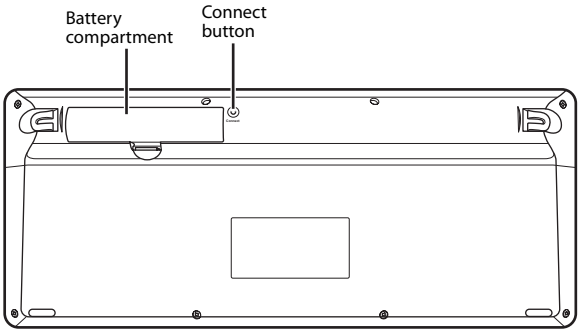

To check the power status of your keyboard:

- Click **Start**, **Control Panel**, **Keyboard**, then click **Bluetooth**.

Mouse top

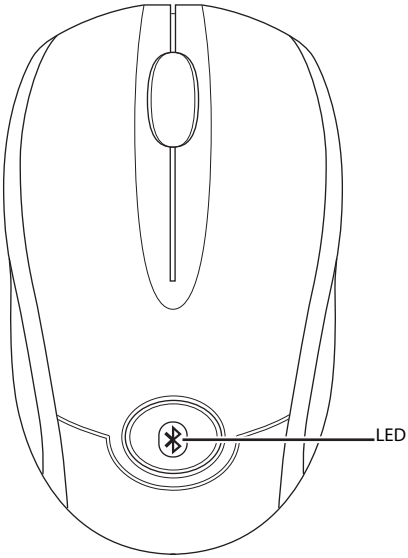

The mouse LED changes depending on the status of the mouse.

- LED red—Batteries are drained. Replace the batteries.
- LED flashing green and red—Mouse is pairing.

Mouse bottom

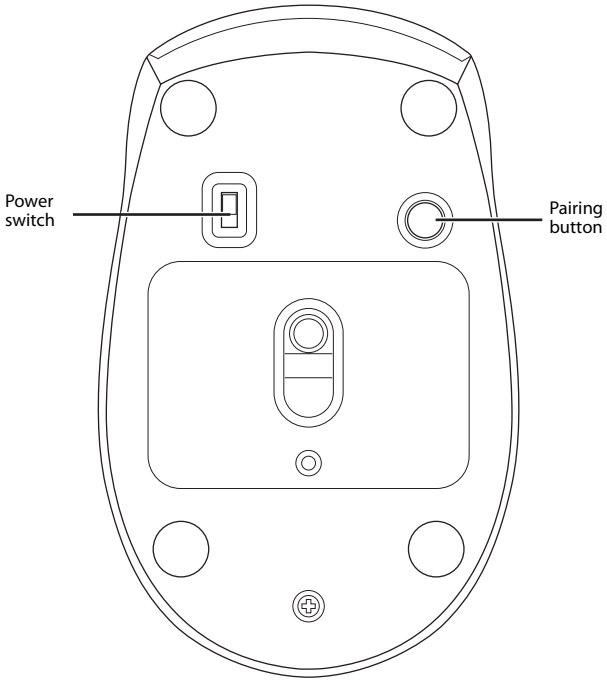

To view more information about your mouse:

- Click **Start**, **Control Panel**, **Mouse**, then click **Bluetooth**.

Setting up your keyboard and mouse

Installing the keyboard batteries

To install the keyboard batteries:

1 Turn your keyboard over so the bottom is facing up.

2 Remove the battery compartment cover.

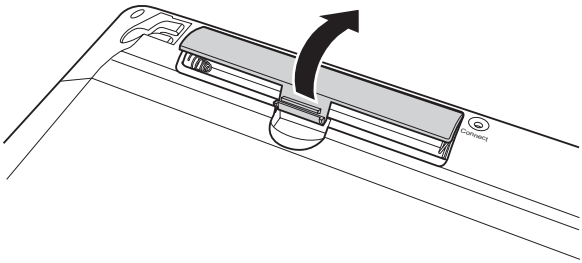

3 Insert two AA batteries into the battery compartment. Make sure that the + and – symbols on the batteries align with the + and – symbols in the battery compartment.

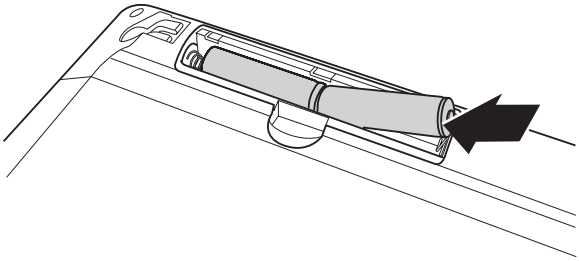

4 Replace the battery compartment cover.

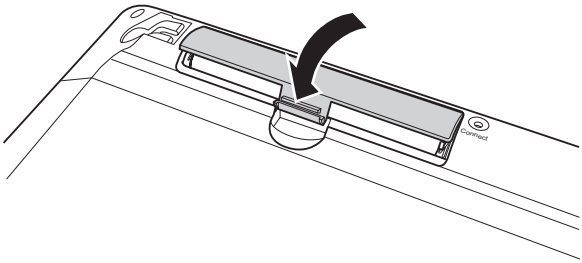

Installing the mouse batteries

To install the mouse batteries:

1 Press the button on top of the mouse to release the battery compartment cover, then remove the cover.

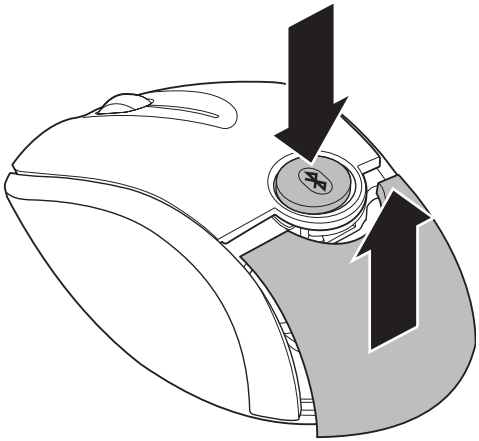

2 Insert two AA batteries into the battery compartment. Make sure that the + and – symbols on the batteries align with the + and – symbols in the battery compartment.

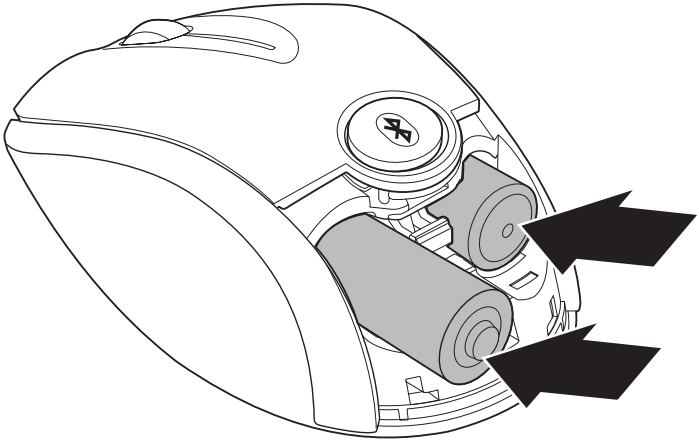

3 Replace the battery compartment cover.

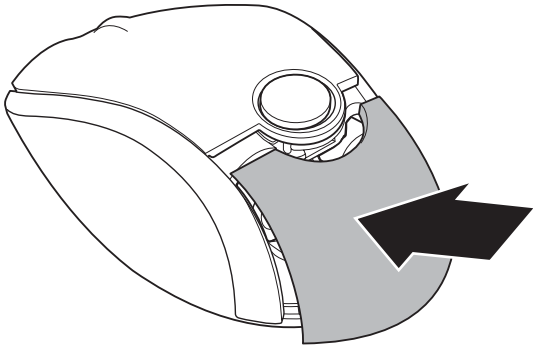

Installing the Bluetooth software

To install the Bluetooth software:

1 Plug your Bluetooth dongle into a USB port on your computer.

2 Insert the provided installation CD into the CD or DVD drive on your computer. The installation program starts automatically and the *Welcome* screen opens. If the program does not start, open the **Setup.exe** file in the **bin** folder on the installation CD.

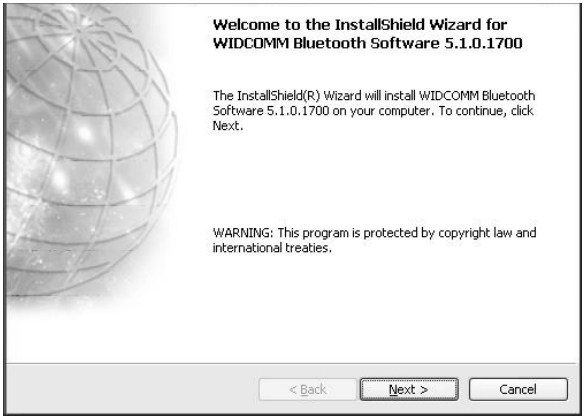
Welcome to the InstallShield Wizard for WIDCOMM Bluetooth Software 5.1.0.1700
The InstallShield(R) Wizard will install WIDCOMM Bluetooth Software 5.1.0.1700 on your computer. To continue, click Next.
WARNING: This program is protected by copyright law and international treaties.
< Back
Next >
Cancel

3 Click **Next**. The *License Agreement* screen opens.

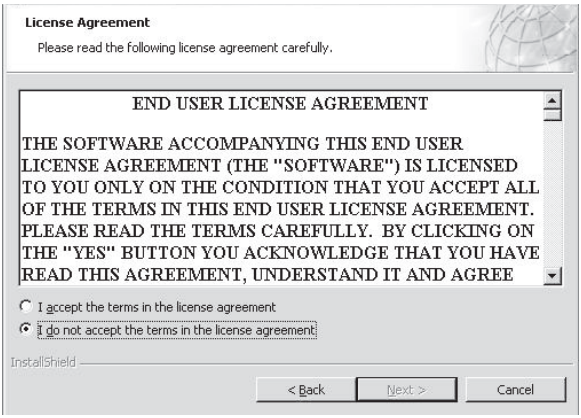
License Agreement
Please read the following license agreement carefully.
END USER LICENSE AGREEMENT
THE SOFTWARE ACCOMPANYING THIS END USER LICENSE AGREEMENT (THE "SOFTWARE") IS LICENSED TO YOU ONLY ON THE CONDITION THAT YOU ACCEPT ALL OF THE TERMS IN THIS END USER LICENSE AGREEMENT. PLEASE READ THE TERMS CAREFULLY. BY CLICKING ON THE "YES" BUTTON YOU ACKNOWLEDGE THAT YOU HAVE READ THIS AGREEMENT, UNDERSTAND IT AND AGREE
I accept the terms in the license agreement
I do not accept the terms in the license agreement
InstallShield
< Back
Next >
Cancel

4 Read the license agreement, click **I accept the terms in the license agreement**, then click **Next**. The *Destination Folder* screen opens.

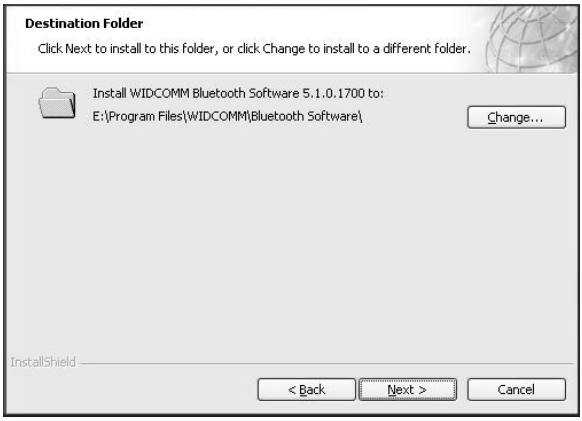
Destination Folder
Click Next to install to this folder, or click Change to install to a different folder.
Install WIDCOMM Bluetooth Software 5.1.0.1700 to:
E:\Program Files\WIDCOMM\Bluetooth Software\
Change...
InstallShield
< Back
Next >
Cancel

5 If you want to accept the default installation folder, click **Next**. The *Ready to Install the Program* screen opens.

Or

If you want to change the installation folder, click **Change**, select the folder you want, then click **Next**. The *Ready to Install the Program* screen opens.

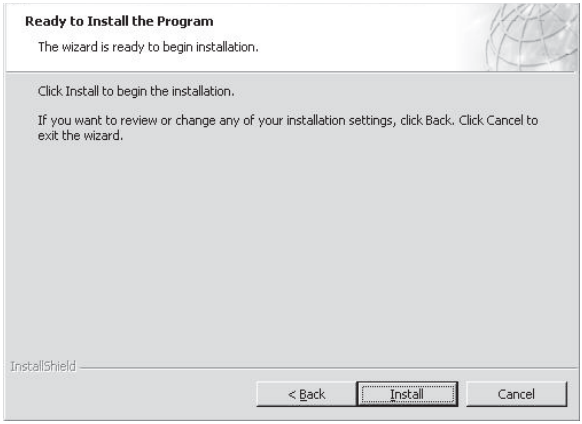
Ready to Install the Program
The wizard is ready to begin installation.
Click Install to begin the installation.
If you want to review or change any of your installation settings, click Back. Click Cancel to exit the wizard.
InstallShield
< Back
Install
Cancel

6 Click **Install**. The installation begins. This process may take several minutes. When the installation is complete, the *Install Wizard Completed* screen opens, but do **not** click **Finish** yet.

InstallShield Wizard Completed
The InstallShield Wizard has successfully installed WIDCOMM Bluetooth Software. Click Finish to exit the wizard.
< Back
Finish
Cancel

7 Unplug the dongle, then plug it back in. Your keyboard and mouse pair automatically.

8 Click **Finish**.

9 When you are prompted to restart your computer, click **Yes**.

About the Bluetooth icon

The Bluetooth icon appears on the Windows system tray. The icon acts as an indicator for dongle status.

- A red icon indicates there is no dongle inserted.
- A white icon indicates the dongle is plugged in.
- A green icon indicates the dongle has detected the Bluetooth devices.

Removing the Bluetooth software

To remove the Bluetooth software:

1. Unplug the dongle.
2. Click **Start**, **Control Panel**, then click **Add/Remove Programs**.
3. Click **WIDCOMM Bluetooth Software** in the list of programs, then click **Remove**.
4. When you are prompted to restart your computer, click **Yes**.

Automatically pairing in boot mode (after initial pairing)

To automatically pair in boot mode:

1. Make sure that your computer is turned off, then plug the USB Bluetooth dongle into a USB port on your computer.

2 Slide the power switch on the bottom of the mouse to turn on the mouse. The Bluetooth connection is established.

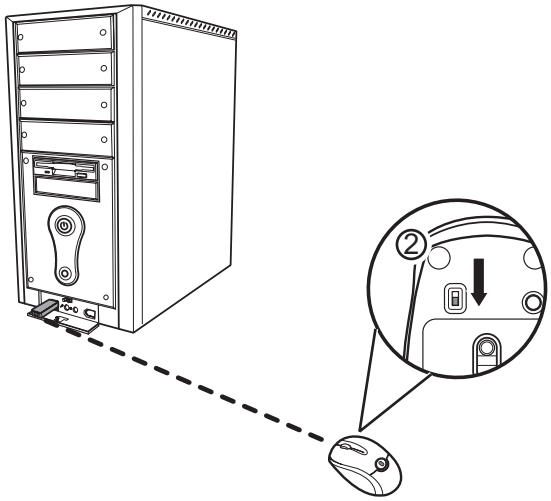

3 Turn on your computer.

4 Use the keyboard to open the BIOS Setup utility. See your computer's documentation for information about opening the BIOS Setup utility.

5 Use the keyboard arrow keys to navigate through the BIOS and to turn on the USB function for the USB keyboard and mouse. (Depending on the BIOS, you may be able to navigate with the wireless mouse.)

Note: *Some older computers do not support USB keyboards or mice in the BIOS/DOS environment.*

Quick pairing in Windows

Your Bluetooth keyboard and mouse have been set to a pre-pairing mode as the factory default. For quick pairing, you need to enable the pre-pairing mode.

To quick pair in Windows:

1 Plug the USB dongle into a USB port on your computer.

2 If the Found New Hardware wizard opens, click **Cancel** to close the wizard.

3 Press the pairing button on the bottom of the mouse.

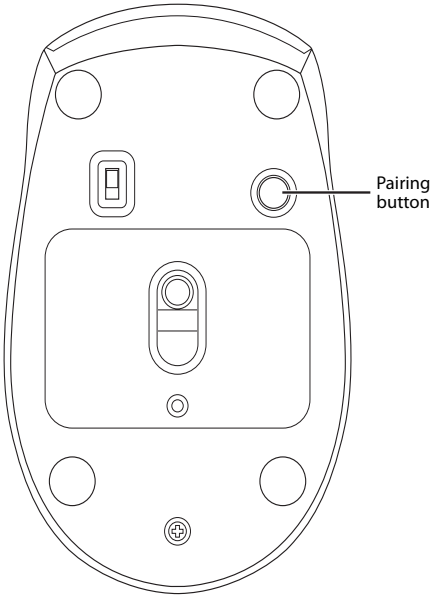

4 Use the tip of an unfolded paper clip (or similar object without a sharp tip) to gently press the connect button (inside the hole on the back of the keyboard) for two seconds.

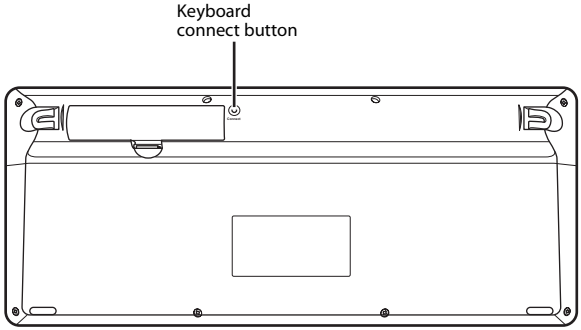

5 Press the button on the USB Bluetooth dongle until the LED begins to flash once every second. This indicates the Bluetooth dongle is searching for devices to pair. While pairing, the mouse LED flashes red and green.

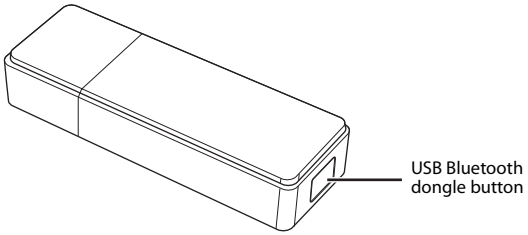

Note: *If you press the mouse pairing button or the keyboard connect button, the pairing settings are cancelled. To reconnect the mouse or keyboard, repeat Step 5.*

6 Press any keyboard key and move the mouse to make sure that they are connected.

Starting the Bluetooth software

To start the Bluetooth software for the first time:

1 Double-click the Bluetooth icon on the Windows system tray. The first Bluetooth Configuration Wizard opens.

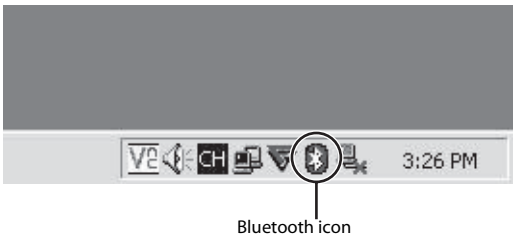

2 Follow the on-screen instructions. When configuration is complete, the *Select a device* dialog box opens and your computer starts searching for Bluetooth devices.

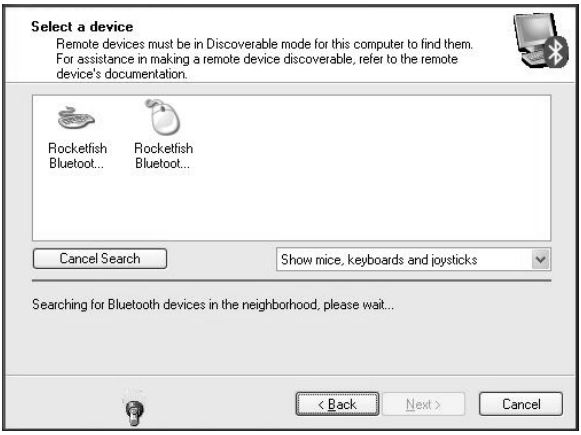
Select a device
Remote devices must be in Discoverable mode for this computer to find them. For assistance in making a remote device discoverable, refer to the remote device's documentation.
Rocketfish Bluetoot...
Rocketfish Bluetoot...
Cancel Search
Show mice, keyboards and joysticks
Searching for Bluetooth devices in the neighborhood, please wait...
< Back
Next >
Cancel

3 Click the device you want to connect, then follow the on-screen instructions.

Pairing with the Bluetooth software

To pair with the Bluetooth software:

1 Press the USB Bluetooth dongle button until the following dialog box opens.

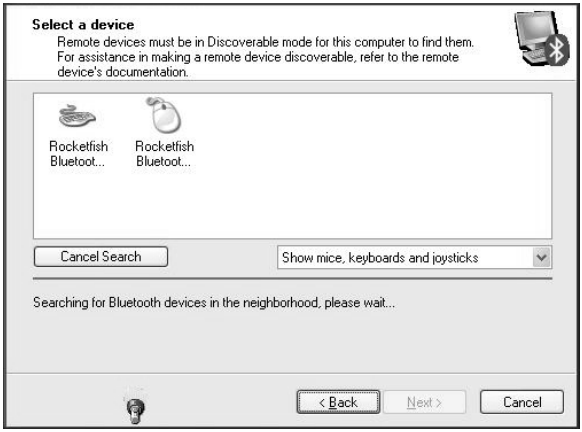
Select a device
Remote devices must be in Discoverable mode for this computer to find them. For assistance in making a remote device discoverable, refer to the remote device's documentation.
Rocketfish Bluetoot...
Rocketfish Bluetoot...
Cancel Search
Show mice, keyboards and joysticks
Searching for Bluetooth devices in the neighborhood, please wait...
< Back
Next >
Cancel

2 When you are prompted to confirm that the correct mouse was found, click **Click here** with your mouse. The *Bluetooth Pairing* dialog box opens.

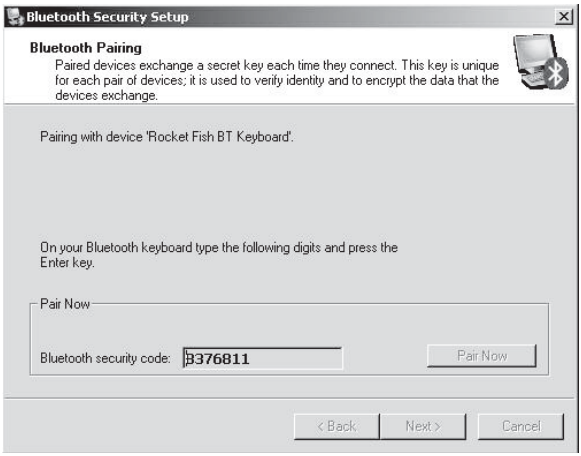
Bluetooth Security Setup
Bluetooth Pairing
Paired devices exchange a secret key each time they connect. This key is unique for each pair of devices; it is used to verify identity and to encrypt the data that the devices exchange.
Pairing with device 'Rocket Fish BT Keyboard'.
On your Bluetooth keyboard type the following digits and press the Enter key.
Pair Now
Bluetooth security code: 3376811
Pair Now
< Back
Next >
Cancel

3 Type the numbers you see in the **Bluetooth security code** box, then press **Enter**.

Note: *Each time the keyboard is connected, the security code changes.*

Connecting other Bluetooth devices

In addition to your keyboard and mouse, you can connect other Bluetooth devices with the Bluetooth software and dongle.

To connect another Bluetooth device:

1 Make sure that the USB Bluetooth dongle is plugged into your computer.

2 Press the USB Bluetooth dongle button until the following dialog box appears:

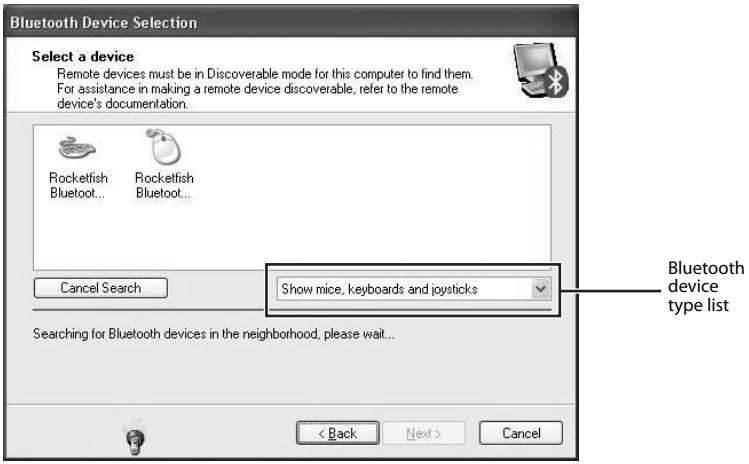
Bluetooth Device Selection
Select a device
Remote devices must be in Discoverable mode for this computer to find them. For assistance in making a remote device discoverable, refer to the remote device's documentation.
Rocketfish Bluetoot...
Rocketfish Bluetoot...
Cancel Search
Show mice, keyboards and joysticks
Searching for Bluetooth devices in the neighborhood, please wait...
< Back
Next >
Cancel
Bluetooth device type list

3 Click the arrow to open the Bluetooth device type list, then click the type of device you want to use. A list of available devices appears.

4 Click on the device you want to use, then follow the on-screen instructions for configuring the device.

5 Enter the Bluetooth security code from the device user manual.

Troubleshooting

- Make sure that your computer meets system requirements.
- Make sure that the batteries in the keyboard and mouse are installed correctly. Make sure the + and – symbols on the batteries align with the + and – symbols inside the battery compartments.
- If the mouse LED is red, you need to replace the batteries.
- Check the battery status of the mouse by clicking **Start**, **Control Panel**, **Mouse**, then clicking **Bluetooth**.
- Check the battery status of keyboard by clicking **Start**, **Control Panel**, **Keyboard**, then clicking **Bluetooth**.
- If the keyboard and mouse do not work, make sure that the USB keyboard and mouse functions are enabled in your computer's BIOS. The functions should be enabled for the normal use of keyboard and mouse. If your computer's BIOS has options for the keyboard or mouse, make sure that they are set to default settings. If you are not familiar with the BIOS, refer to your computer's documentation for more information.
- Use the mouse on a clean, flat, non-slippery surface in order to ensure smooth and accurate cursor action. If you use a mouse pad, choose a light-colored one, not a dark one, to use less battery power.

Legal notices

FCC Statement

This device can be expected to comply with Part 15 of the FCC Rules provided it is assembled in exact accordance with the instructions provided with this kit. Operation is subject to the following conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received including interference that may cause undesired operation.

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

RSS statement

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that permitted for successful communication.

Copyright

© 2008 Rocketfish. Rocketfish and the Rocketfish logo are trademarks of Best Buy Enterprise Services, Inc. Other brands and product names are trademarks or registered trademarks of their respective holders. Specifications and features are subject to change without notice or obligation.

For service and support call 1-800-620-2790.

www.rocketfishproducts.com (800) 620-2790
Distributed by Best Buy Purchasing, LLC
7601 Penn Avenue South, Richfield, MN 55423-3645 USA
© 2008 Best Buy Enterprise Services, Inc.
All rights reserved. ROCKETFISH is a trademark of Best Buy Enterprise Services, Inc.
All other products and brand names are trademarks of their respective owners.

rocketfish™

ENGLISH
08-1728